

PROJECT _____

ITEM _____

QUANTITY _____

DATE _____

The Anets Goldenfry range now includes a wide variety of tube fryers using the inverted burner design to deliver efficiency and fast recovery.



FEATURES & BENEFITS:

- Goldenfry tube fryer filter systems come standard with AGG14R 4 gas tube millivolt control fryers banked together
- Millivolt control - 4 fryer filter drawer system
- Easy two step filtering
- 30 litre per minute filter pump for fast refill times
- Self aligning filter connection for effortless hookup
- Rear oil return for bottom cleaning
- Filter pan is stainless with rear wheels for easy handling
- Filter pan lid is self storing and out of the way
- All filtration systems come standard on adjustable height castors, and with Washdown/discharge hose, Box of 100 envelope papers, Starter sample pack of filter powder, Lids, Clean out rod and brush


TECHNICAL DATA:

| | | |
|---------------------------|------------------------|--|
| Dimensions (W x D x H): | 1588 x 876 x 1172 | |
| Total Weight: | 380Kg | |
| Cooking Area (W x D x H): | 356 x 356 x 127mm (x4) | |
| Oil Capacity: | 19-21 Litres per tank | |

| GAS DETAILS | Natural Gas (NG) | Universal LP Gas (ULPG) |
|-------------------------|------------------|-------------------------|
| Minimum Supply Pressure | 1.7 kPa | 2.74 kPa |
| Operating Pressure | 1.0 kPa | 2.5 kPa |
| Total Gas Supply | 516MJ/Hr | 516MJ/Hr |
| 3/4" BSP connection | | |

NOTE: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure when all appliances are full on.

240 Volt 10Amp connection required to run filter system.

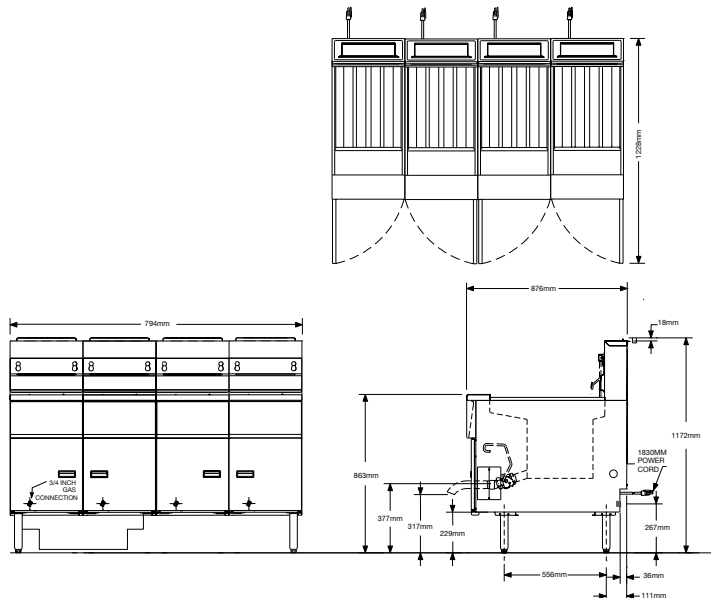

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: 16/7/2020

www.stoddart.com.au

www.stoddart.co.nz