

800 SERIES RANGES GAS COOKTOPS

PFB48-X, PFB12G6-X, PFB24G4-X, PFB36G2-X PFB12Q6-X, PFB24Q4-X, PFB36Q2-X



Standard features and benefits

- High performance, even heat 33 MJ open burners
- Fully welded surrounds for griddle and chargrill option
- · Heavy duty welded stainless steel body for rigidity and durability
- The flexible modular cooktop design allows for various combinations of burners, griddle plates, and chargrill options (305, 610, 914 and 1219mm)
- · Constant pilot flame, maximises operating and energy efficiency
- Pilot flame failure on open burners
- · Stainless steel fascia and sides, spill zone and drip trays for ease of cleaning
- Large, heat resistant reinforced control knob with easy to view settings and high to low flame control
- · Griddle and chargrill section are on left hand side
- Adjustable legs
- · Easy to service

Burners

- · Removable, high performance, even heat 33 MJ cooktop burners for peak productivity
- 40% of the flame ports are in the centre cross of the burner
- · Cast iron star trivet

Griddle plate

- · 20mm thick mild steel griddle plate
- 20 MJ griddle burners per every 305mm section
- · Piezo ignition

Chargrill

- Heavy duty cast iron reversible grates provide greater control when cooking, energy efficiency, and offer two char pattern options
- 2 levelling options flat or gradient
- 2x 20 MJ inline radiant burners per every 305mm section
- Front grease trough, generous chute and catcher
- Ceramic rocks option available to increase heat retention and flavour


Other options

- · Bench mounted
- Stand with undershelf







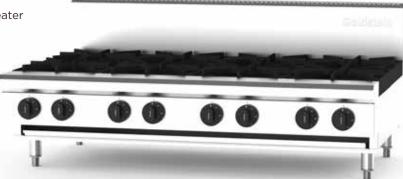


HEAD OFFICE



PFB48-X, PFB12G6-X, PFB24G4-X, PFB36G2-X, PFB12Q6-X, PFB24Q4-X, PFB36Q2-X

800 SERIES GAS COOKTOPS

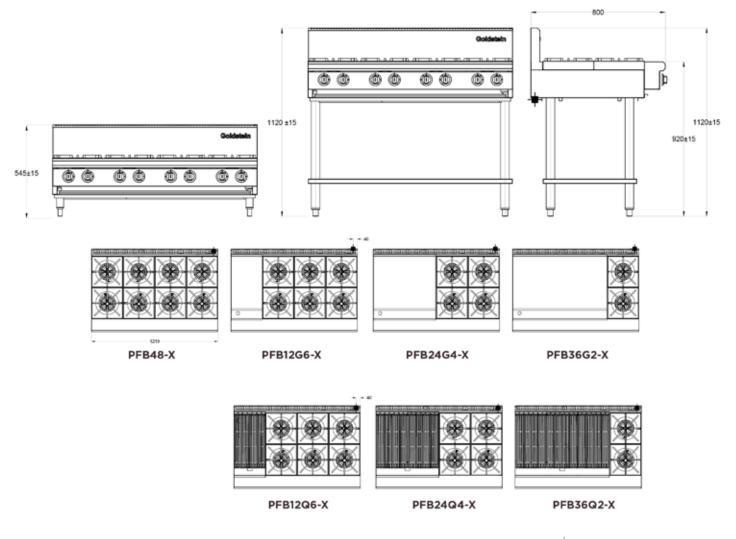

₹ 3/4" BSP Gas Connection

SPECIFICATIONS

Dimensions	bench mounted	1219 x 800 x 545 mm		
(WxDxH)	on stand	1219 x 800 x 1120 mr		
Griddle size	PFB12G6-X	305 x 520 x 20 mm		
	PFB24G4-X	610 x 520 x 20 mm		
	PFB36G2-X	914 x 520 x 20 mm		
Chargrill size	PFB12Q4-X	305 x 510 mm		
	PFB24Q2-X	610 x 510 mm		
	PFB36Q2-X	914 x 510 mm		

Gas connect	tion	3/4" BSPM	
Rating NG/LPG	PFB48-X	264/264 M	
	PFB12G6-X	218/218 MJ	
	PFB24G4-X	172/172 MJ	
	PFB36G2-X	126/126 MJ	
	PFB12Q6-X	238/236 MJ	
	PFB24Q4-X	212/208 MJ	
	PFB36Q2-X	186/180 MJ	
Packed dime	ensions without stand	1280 x 900 x 870 mm	

Available in Natural and LP gas

INSTALLATION CLEARANCES (minimum)

Combustible Material	Sides	250* mm	Non-combustible Material	Sides	0 mm
	Back	50 mm		Back	0 mm

Note: * If adjacent surface is of combustible material and is 100mm below the cooking surface, then only 50mm clearance is required.

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice



v1_2024