

Curved Glass Refrigerated Display Bars

These units match the complete range of curved glass hot food display bars. Together they offer a stylish visual display to enhance your product. Designed to take a variety of gastronorm pans up to 65 mm deep. All units combine the use of cold plate and cross fin coil cooling. Set of 1/2 size 65 mm pans included.



FEATURES

- All stainless steel construction with tubular frame
- Refrigerated cold plate and cross fin coil technology
- Quality refrigeration unit running on environmentally friendly R404A refrigerant
- Overhead LED light
- Quiet operation
- Double skin construction
- Safety lock ball valve drain
- Streamlined for easy cleaning
- Toughened safety glass front
- Adjustable digital thermostat with temperature readout
- Removable cross bars
- Rear roller doors fitted as standard

See pages 52 - 54 for all optional accessories.



CRX24RD

SPECIFICATIONS


| MODEL | NO. OF PANS | POWER Watts [^] | CURRENT Amps | DIMENSIONS w x d x h (mm) |
|--|-------------|--------------------------|--------------|---------------------------|
| REFRIGERATED COLD PLATE & CROSS FIN COIL | | | | |
| CRX23RD | 6 | 530 | 2.3 | 1030 x 615 x 750 |
| CRX24RD | 8 | 625 | 2.7 | 1355 x 615 x 750 |
| CRX25RD | 10 | 815 | 3.5 | 1680 x 615 x 750 |
| CRX26RD | 12 | 815 | 3.5 | 2005 x 615 x 750 |
| COLD PLATE & CROSS FIN COIL - PIPED & FOAMED ONLY (NO MOTOR) | | | | |
| CFX23RD | 6 | 30 | 0.2 | 1030 x 615 x 750 |
| CFX24RD | 8 | 45 | 0.3 | 1355 x 615 x 750 |
| CFX25RD | 10 | 45 | 0.3 | 1680 x 615 x 750 |
| CFX26RD | 12 | 45 | 0.3 | 2005 x 615 x 750 |

[^]Nominal ref. capacity.

Note: RD signifies roller doors included. CFX units are piped and foamed for remote installation and include control panel, thermometer & light. Refrigeration unit and cage is **not** included for CFX range.

Roband food display bars are designed to accommodate pans available from Roband Australia. Although other brands of pans may fit, this is not guaranteed due to variations in other manufacturers' pans.

Adjustable digital thermostat, 0 °C to 8 °C

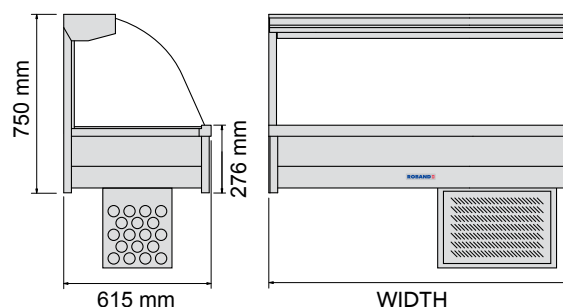

Note: For CRX model range overall height dimensions, add height of motor cage (450 mm).