


RF7.UBR.2.GD

ReFlex Series, 2 Door (Glass), Underbench Fridge

Project: _____

Item No: _____

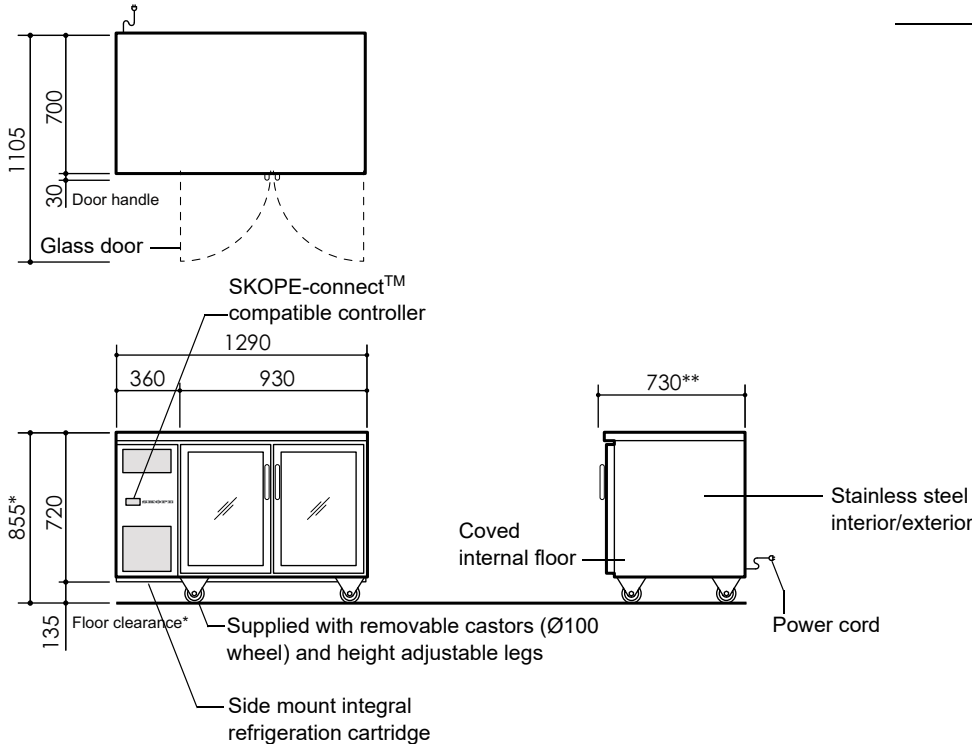

CABINET	
Model ID	RF7.UBR.2.GD
SKOPE ID	RB2R
Doors	2 × self-closing, lockable, double glazed, double Low-E, glass swing doors. LH, RH
Internal door opening	2 × door openings: 560mm high × 355mm wide
Shelves	4 × adjustable height shelves: 395mm wide × 510mm deep Note: Bottom shelves supplied floor mounted, additional shelf clips available on request
Worktop	Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating cyclopentane foamed core)
Material	304 AISI stainless steel interior and exterior
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect 0°C to 15°C)
Total energy consumption	2.39 kWh/24hr
ELECTRICAL	
Climate class	5 (40°C/40% RH)
Interior lighting	1 × 400mm, 4W LED light
Power cord	Supplied with 2.6m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.0 Amps (includes unit 1.5 Amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Side mounted, integral, removable refrigeration cartridge (part number ULKCNI-0027)
Refrigerant	R290 / 80g (natural refrigerant)
Nominal capacity	450 Watts
Heat rejection (Avg/peak)	100 Watts/110 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	855mm*	570mm
Width	1290mm	820mm
Depth	730mm**	530mm
Floor area	0.94m ²	
Weight	116kg	
Internal volume	248 litres	

* With supplied castors fitted. See height variation below
** Includes 30mm door handle

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	Not required
Sides	Not required
Back	Not required
Bottom	Not required